




1 2 3 4 5 6 7 8 9

F





D REF.

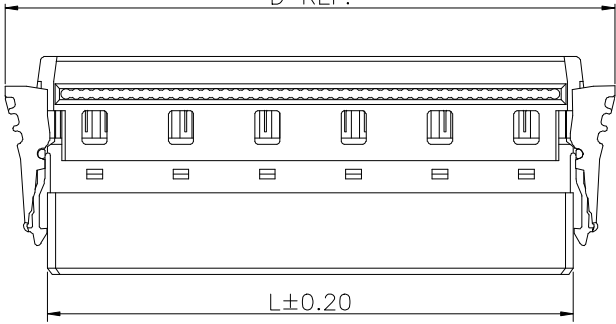

Specifications  
 Current Rating:1.1Amp  
 Insulation Resistance:10000MΩMin.  
 Dielectric Withstanding Voltage:500VAC  
 Contact Resistance:10mΩMax.  
 Operating Temperature:-55°C to +125°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material  
 All materials must meet GREENCONN hazardous substances control standards.  
 "★":Critical Characteristics, indicates product characteristics, functionalities,and manufacturing processes regarding to customer's specifications  
 "☆":Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

E

D

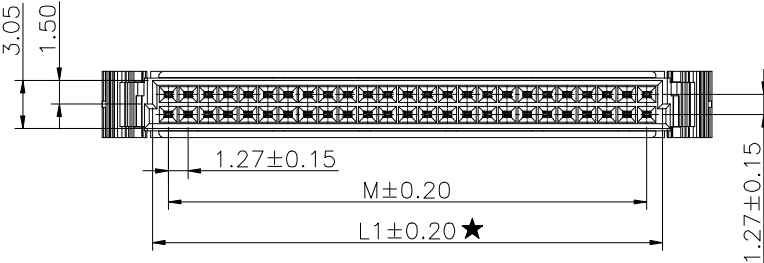

C

### Ordering Information

C QEA217 - XX XX A 002 C 1 S X

No. of Pins per Row: 06,10,13,16,25, 34,40  
 Standard Plating: 77=15u" gold plating on contact area, matte tin plating on solder area  
 Color: 1=Black  
 Standard Packing: B=Tray

No. of Pin/Row	Dimension Information			
	M	L1	L	D
2X6	6.35	8.37	9.37	14.71
2X10	11.43	13.45	14.45	19.79
2X13	15.24	17.26	18.26	23.60
2X16	19.05	21.07	22.07	27.41
2X25	30.48	32.50	33.50	38.84
2X34	41.91	43.93	44.93	50.27
2X40	49.53	51.55	52.55	57.89

B

A



3RD.ANG PROJ.  
  
 PAGE. 1/1

GENERAL TOLERANCE	
X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED: \_\_\_\_\_ DATE: \_\_\_\_\_  
 CHECKED: \_\_\_\_\_ DATE: \_\_\_\_\_  
 APPROVED: \_\_\_\_\_ DATE: \_\_\_\_\_

DWG. NO. CQEA217-CA2CS  
 PART NO. CQEA217-XXXX A002 C1SX

TITLE. IDC Female Connector Type B with Locking Latches

REV. B UNIT. mm SCALE. 5:3

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A