




1 2 3 4 5 6 7 8 9

F

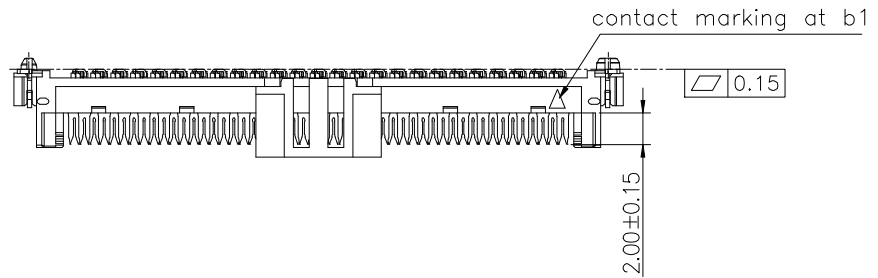


Specifications
 Current Rating:1.3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Moisture sensitivity level: 1
 Operating Temperature:-55°C to +125°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

E

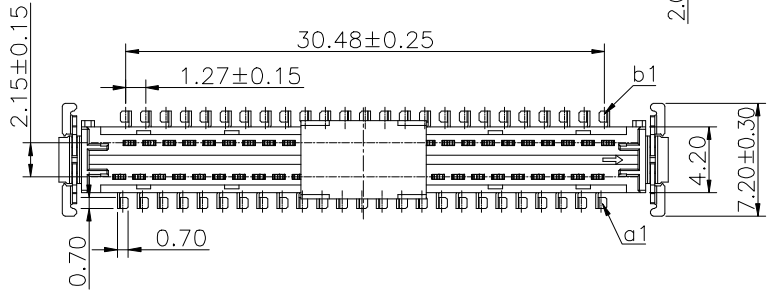


D

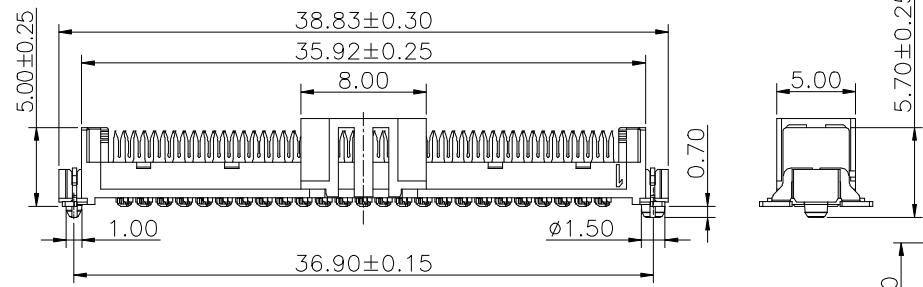

C

Recommended P.C.Board Layout
 (Tolerance:±0.05)

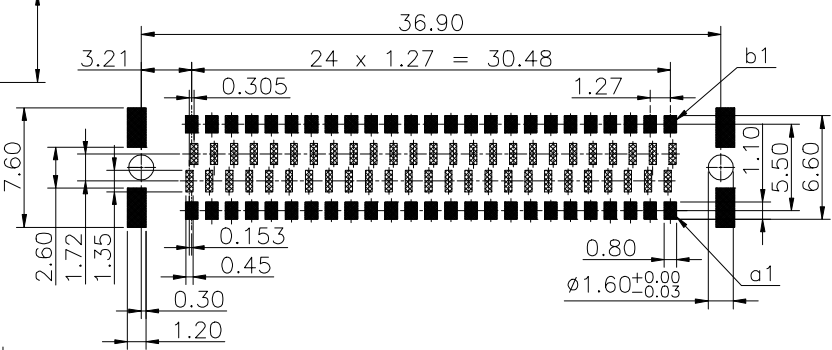

B

Ordering Information

G QEC201 - XX XX B 001 C X S X
 No. of Pins per Row 25
 Standard Plating 22=Matte Tin
 Color 1=Black
 Standard Packing F=CAP+Tape&Reel

A

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.	GQEC201-CB1CS
PART NO.	GQEC201-25XXB001C1SX

TITLE.
 1.27 DRC board on IDC
 50-polig50-contacts

REV. 02	UNIT. mm	SCALE. 5:2	PAGE. 1/1	
---------	----------	------------	-----------	--

1 2 3 4 5 6 7 8 9